2023 COLLECTION SHOTGUN PCP AIR RIFLE



www.aselkonarms.com

www.aselkonarms.com



We, ASELKONAŞ, are a well established international company that manufactures external factor. In this way, in every stage of prodcution we manage our quality and exports Hunting, Sporting, and Tactical Military Purpose Shotguns, Pistols, PCP Air Rifles and all spare parts of firearms in accordance with internationally As well as our major operations in international markets, we continue to cooperate sector since 2006 with our vast experience in manufacturing and exporting to industry. more than 50 countries. Our products are highly appreciated in many leading As being one of the leading manufacturers in firearms industry, we constantly markets in the world.

productive and experienced technical staff, we manufacture every parts of guns satisfaction. from raw material to final product in our own facilities without depending on any


accepted standards, especially to ATF and CIP proof tests, and Country-Specific with government and military forces in delivering diverse projects regarding Firearms Compliance Regulations. We've been actively operating in the firearms armored vehicles, missile launcher platforms, crane – machinery and construction

improve our product and service quality with the concepts of high automation and flexibility in order to provide better quality products and effective solutions for the Thanks to our 40.000 m² fully integrated production facility, with our dynamic, needs customers. We always aim the best in quality and increase the customer

FUNCTIONING | STOCK DETAILS




FUNCTIONING TEST
CONDITIONS TEST
3D & GUN CHECKS TEST
ACCURACY TEST
PRESSURE DROP TEST



DAC is can be adjustable to 35-39 mm



DAH is can be adjustable to 45-50-55-60 mm



LOP is can be adjustable to -5, -10 mm



SHOTGUN

×З	10-21	inter	46-59	Super MAGNUM	76-87	MODELS HYBRID	100-109
%4	22-33	RedStone	60-71	OVER	88-94	53 MODELS HYBRID	110-119
%5	34-45	RedS <u>port</u>	72-75	TACTICAL	94-99	ASK12	120-123

PCP AIR RIFLES

MX5	136-137	MX8	144-145	RX5	152-153
MX6	138-139	мх9	146-147	RX6	154-155
MX7	140-141	MX10	148-149	RX1250	156-157
MX7-S	142-143	MX10-S	150-151		
	MX6 MX7	MX6 138-139 MX7 140-141	MX6 138-139 MX9 MX7 140-141 MX10	MX6 138-139 MX9 146-147 MX7 140-141 MX10 148-149	MX6 138-139 MX9 146-147 RX6 MX7 140-141 MX10 148-149 RX1250



1



Aselkon recoil pads which are made of a mixture of special polyurethane and rubber materials minimize the recoil and provides acomfortable targeting and shooting.

SINERTIA TECHNOLOGY

Our proprietary refinements to the ultra-reliable Bruno Civolani "floating bolt" action ensure the Aselkon Shotguns are able to quickly cycle even the lightest 12 gauge loads. Inertia system consists of 3 main parts; bolt mechanism, rotating bolt, and inertia spring. Thanks to its simple combination, inertia system functions faster and flawlessly. Unlike the gas operated systems, since the burnt powder gas does not contact with the mechanism, system remains clean and requires less maintenance. Aselkon's rotating bolt utilizes our unstoppable Inertia Technology Locking System to ensure positive bolt head lock-up to the breach under all conditions.

7





2


INERTIA

ASELKON

(4)


5

Each Aselkon barrel is subjected to a proof test with 1500 BAR high pressure test cartridge before leaving our factory.



Aselkon's improved loading mechanism provies the user quite a smooth loading.



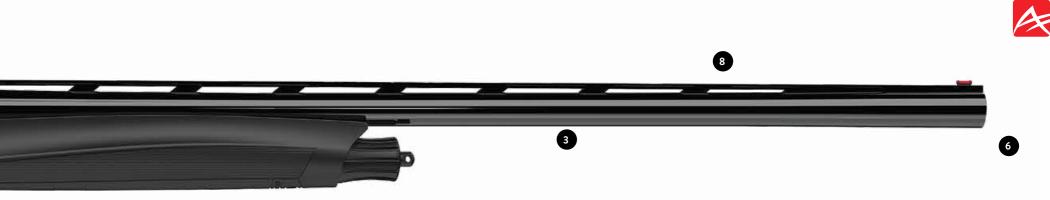

practical shooting.



(INTERPLUSCHOKE - 6 -

We engineered the interchangeable InterPro Chokes to maximize the constancy of shot placement through reduced friction that enhances load speeds.



DROP&CAST ADJUSTMENT



INTERBOREDBARREL ____

Aselkon barrels are standard with our precision drilling, honing and chrome coating process. Aselkon Barrels are designed to increase accuracy, to shoot comfortably and function superbly with both light and heavy loads.



























20-21 ASELKON X3 Tecnical Features

	GA		James 1						0	θ	g									
	Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
X3 Silver Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Gray Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Bronze Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Extra Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Matte Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Bronze Pure	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Dark Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Bottomland	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Battomland	Aluminium Anodized/ Battomland Coating	Battomland	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Bottomland Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Battomland	Aluminium Anodized/ Cerakote Coating	Battomland	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Camo Max5	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Max5	Aluminium Anodized/ Max5 Coating	Max5	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Elegant Sea Green	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Elegant Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Elegant Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Elegant Silver Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X3 Elegant Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1x12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad














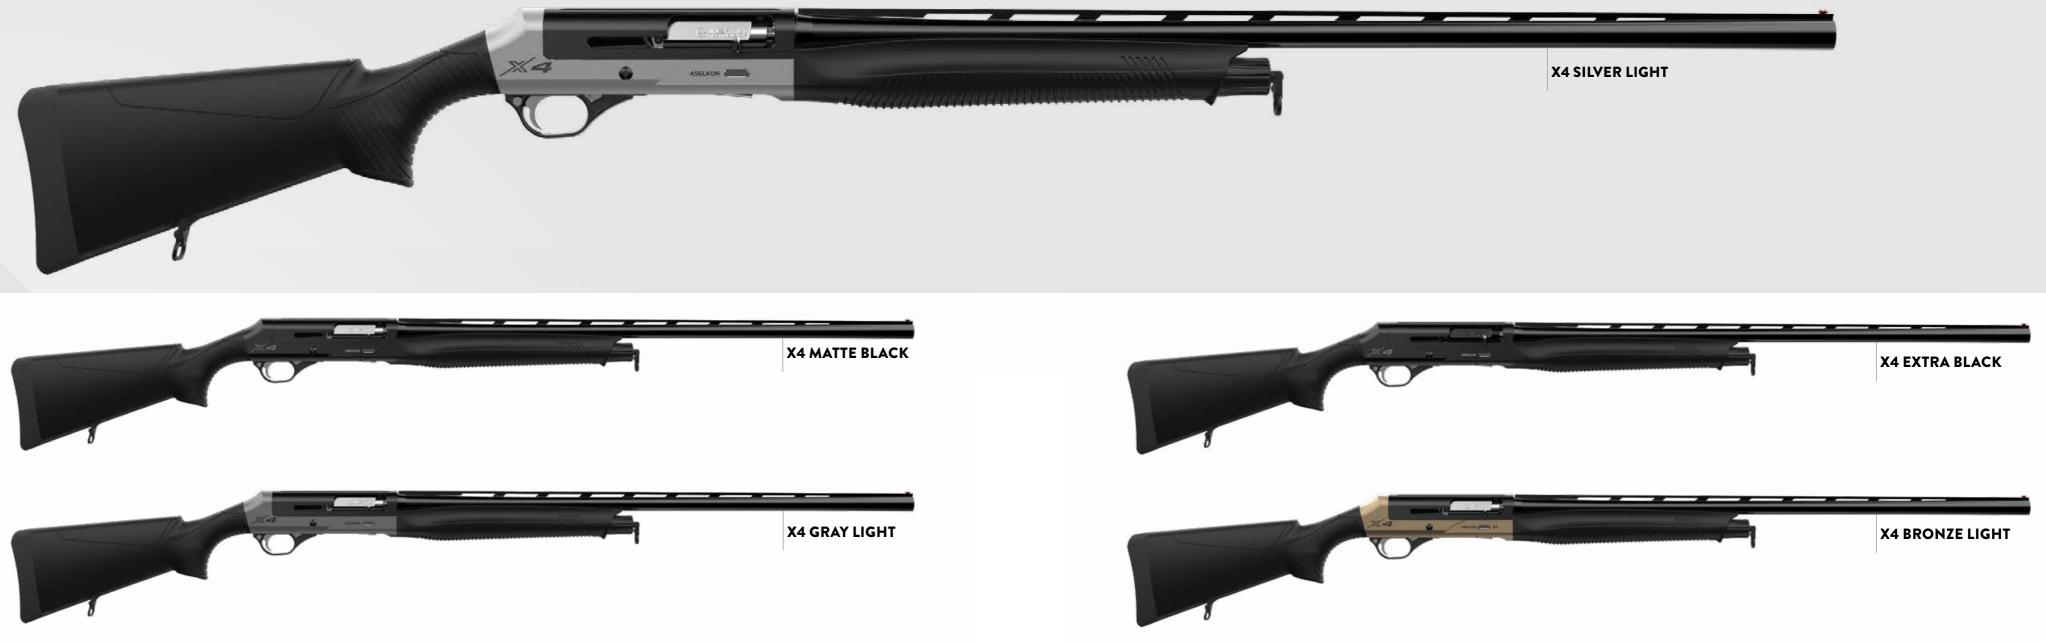













32-33 **ASELKON** X Tecnical Features

			Exect .						0	θ	g									
	Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
X4 Silver Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Gray Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Bronze Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Extra Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Matte Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Bronze Pure	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Dark Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Bottomland	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Bottomland Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Bottomland Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Cerakote Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Camo Max5	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Max5	Aluminium Anodized/ Max5 Coating	Max5	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Elegant Sea Green	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Elegant Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Elegant Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Elegant Silver Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X4 Elegant Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad












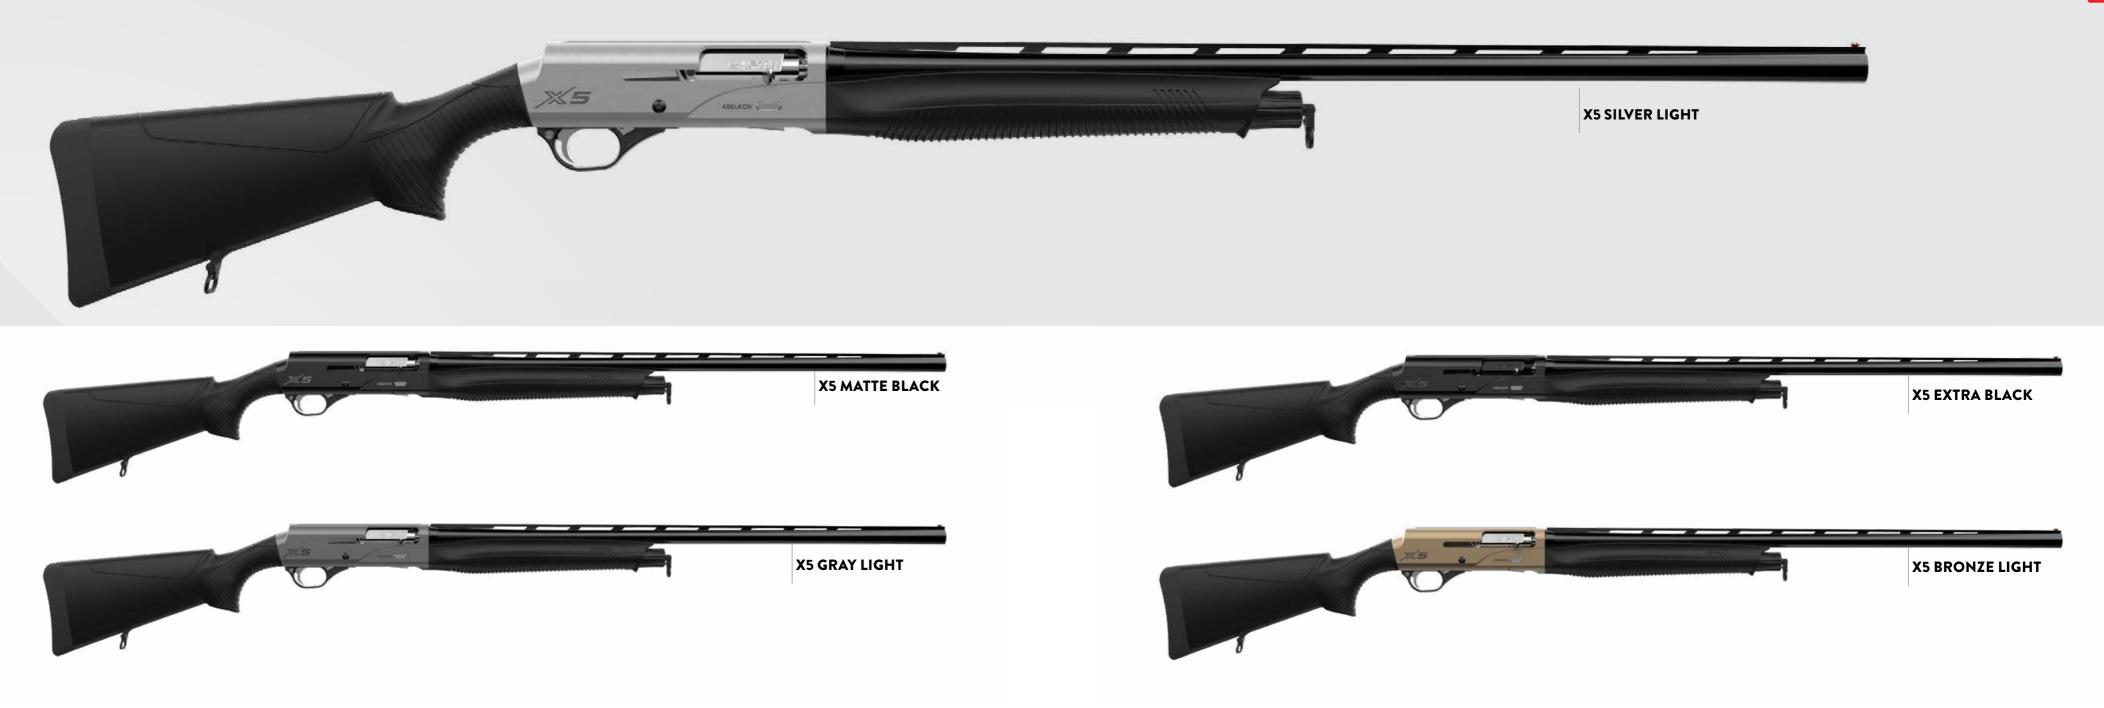













44-45 ASELKON X5 Tecnical Features

	GA G		Frank I						0	θ	g									
	Gauge (Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
X5 Silver Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Gray Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Bronze Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Extra Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Matte Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Bronze Pure	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Dark Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Bottomland	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Bottomland Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Bottomland Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Cerakote Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Camo Max5	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Max5	Aluminium Anodized/ Max5 Coating	Max5	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Elegant Sea Green	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Elegant Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Elegant Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Elegant Silver Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized/ Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
X5 Elegant Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad



















elegant









58-59 **ASELKON** *inter* Tecnical Features

	GA		Press -						0	θ	g									
	Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
Inter Silver Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Gray Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Bronze Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Extra Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Bronze Pure	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Dark Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Bottomland	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized Bottomland Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Bottomland Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized Cerakote Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Timber	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Timber	Aluminium Anodized Timber Coating	Timber	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Timber Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Timber	Aluminium Anodized Cerakote Coating	Timber	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Camo Max5	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Camo Max5	Aluminyum Anodize Camo Max5 Coating	Camo Max5	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Elegant Sea Green	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Elegant Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Elegant Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Elegant Silver-Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Elegant Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm/ High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	2.85± kg	Turkish Luxry Walnut	Aluminium Anodized Cerakote Coating	Turkish Luxry Walnut	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad



















70-71 **ASELKON** *RedStone* Tecnical Features

12 GA 3" 76 mm

12 GA 3" 76 mm

Silver-Black

Red Stone Elegant Black

									0	θ
	Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at
Red Stone Silver Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Extra Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Gray Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Bronze Light	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Bronze Pure	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Dark Black	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Bottomland	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Bottomland Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Redstone Timber Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Camo Max5	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Elegant Sea Green	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Elegant Bronze	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Elegant Silver	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 n
Red Stone Elegant	12 GA 3"	76 mm	Kinetic Drive Inertial System	61-66-71-76 cm	Chrome-Lined, 4140 Steel	5 InterPro	8 mm / High	340 mm	55±1 mm, 45-50-60 mm	37±1 n

Inter Bored Barrel

Chrome-Lined, 4140 Steel

Inter Bored Barrel

C-IC-M-IM-F

5 InterPro

C-IC-M-IM-F

61-66-71-76 cm

Semiautomatic, Rotating Bolt

Kinetic Drive Inertial System

Semiautomatic. Rotating Bolt

340 mm

Adjustable

55±1 mm, 45-50-60 mm

Adjustable


37±1 mm

2.85± kg Turkish Luxry Walnut

Rib

8 mm / High

Rib

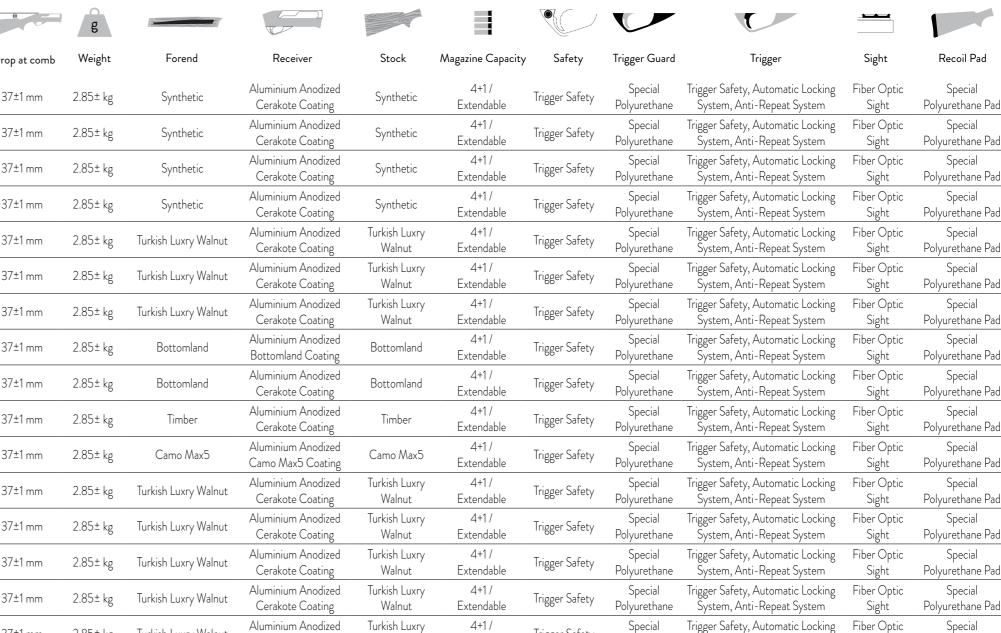

4+1/

Extendable

Special

Polyurethane

System, Anti-Repeat System

Trigger Safety

Turkish Luxry

Walnut

Aluminium Anodized

Cerakote Coating

A

Fiber Optic

Sight

Special

Polyurethane Pad







EASY LOAD



INTERPLUSCHOKE











74-75 **ASELKON RedSport** Tecnical Features













the most COMFORT POWER











3,5" INTER SUPER MAGNUM CAMO MAX5























86-87 **ASELKON MAGNUM** Tecnical Features

	GA C					H		0	θ	g									
	Gauge Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
Inter Super Magnum Extra Black	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Synthetic	Aluminium Anodized Cerakote Coating	Synthetic	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Super Magnum Bottomland	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Bottomland	Aluminium Anodized Bottomland Coating	Bottomland	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Super Magnum Bottomland Bronze	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Bottomland	Aluminium Anodized Cerakote Coating	Bottomland	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Super Magnum Timber	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Timber	Aluminium Anodized Timber Coating	Timber	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Super Magnum Timber Bronze	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Timber	Aluminium Anodized Cerakote Coating	Timber	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Inter Super Magnum Camo Max5	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Camo Max5	Aluminium Anodized Camo Max5 Coating	Camo Max5	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Redstone Super Magnum Extra Black	¹ 12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Synthetic	Aluminium Anodized Cerakote Coating	Synthetic	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Redstone Super Magnum Bottomland	¹ 12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Bottomland	Aluminium Anodized Bottomland Coating	Bottomland	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Redstone Super Magnum Bottomland Bronze	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Bottomland	Aluminium Anodized Cerakote Coating	Bottomland	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Redstone Super Magnum Timber	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Timber	Aluminium Anodized Timber Coating	Timber	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Redstone Super Magnum Timber Bronze	¹ 12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Timber	Aluminium Anodized Cerakote Coating	Timber	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
Redstone Super Magnum Camo Max5	12 GA 3.5" 89 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	61-66-71-76 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	5 InterPro C-IC-M-IM-F	8 mm / High Rib	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.10± kg	Camo Max5	Aluminium Anodized Camo Max5 Coating	Camo Max5	2+1x12/89 Extendable	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad

	/	2	
	2		
- 14			




· Section





COMFORT POWER

Alex Marker

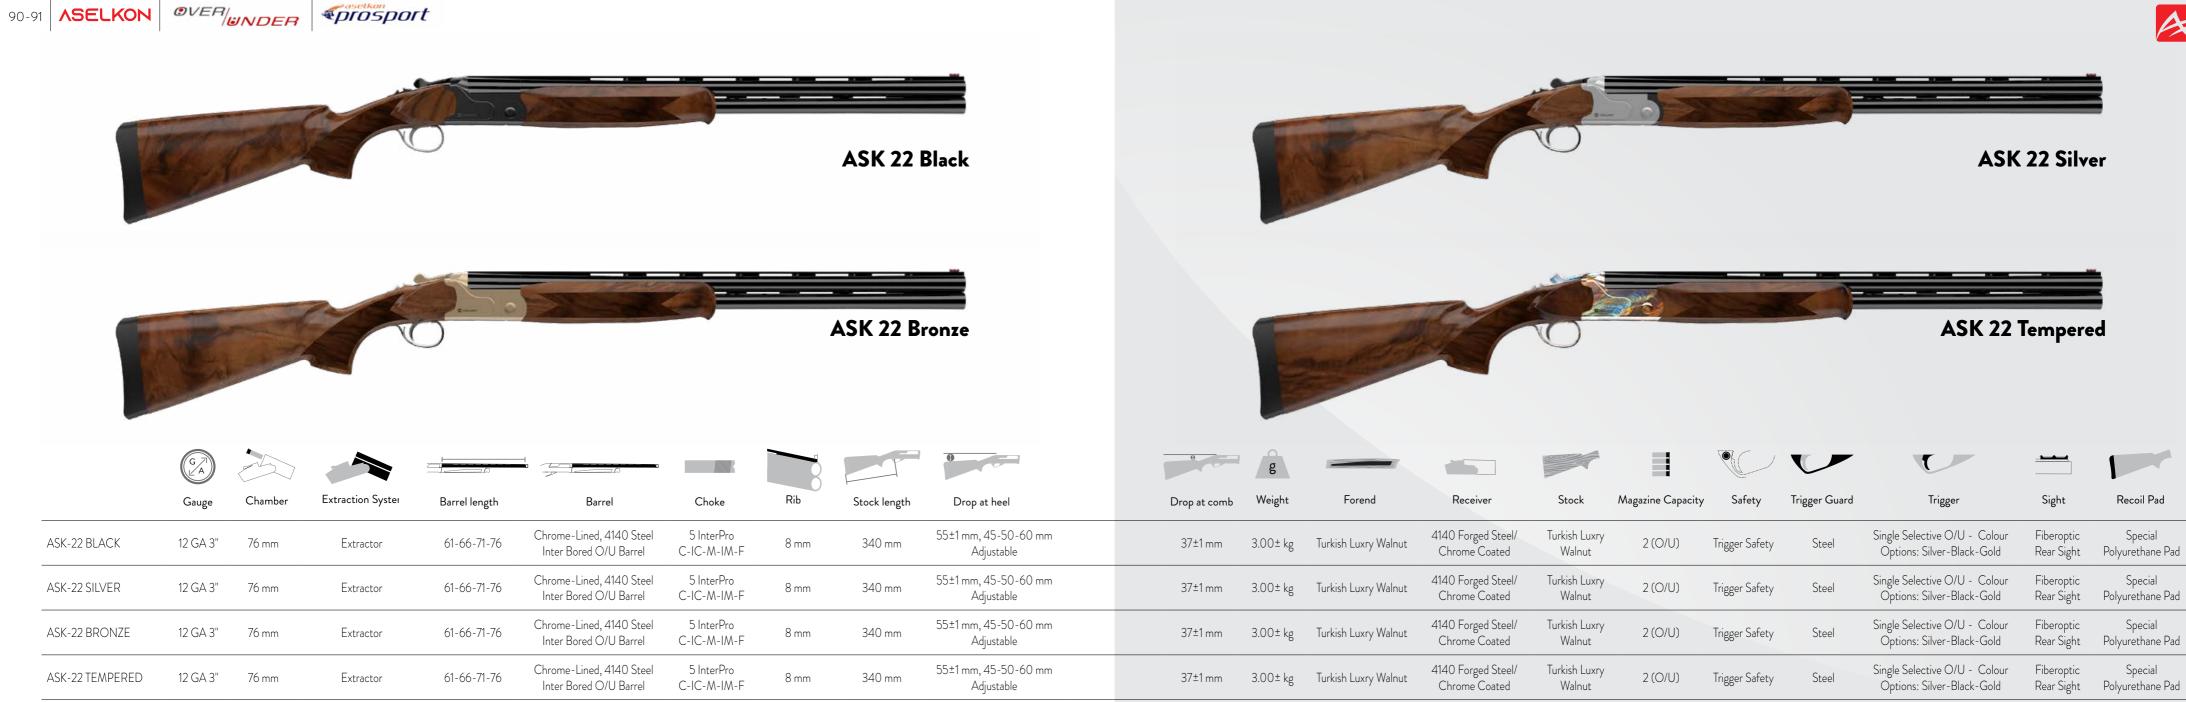

















INTERPLUSCHOKE

Al 15-15.05+

IT1

ASELKON







TACTICAL













98-99 ASELKON	ΤΑCΤΙΟ	AL																			A
						IT 1	-GV-EXTR	A BLACK			11.								IT 1-GV-BOTTOMLA	ND	
	G A Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Dr	e op at comb	g Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
IT1 EXTRA BLACK SEMI-AUTOMATIC	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	47-61-66 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	:	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
IT1-G EXTRA BLACK SEMI-AUTOMATIC	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	47-61-66 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	:	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
IT1-G BOTTOMLAND	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	47-61-66 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	3	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Bottomland Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
IT1-G BOTTOMLAND BRONZE	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	47-61-66 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	:	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Cerakote Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
IT1-GV EXTRA BLACK	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	47-61-66 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	3	37±1 mm	2.85± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad
IT1-GV BOTTOMLAND	12 GA 3"	76 mm	Kinetic Drive Inertial System Semiautomatic, Rotating Bolt	47-61-66 cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	8 mm	340 mm	55±1 mm, 45-50-60 mm Adjustable	:	37±1 mm	2.85± kg	Bottomland	Aluminium Anodized/ Bottomland Coating	Bottomland	4+1	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Fiber Optic Sight	Special Polyurethane Pad









the most COMFORT POWER

Hee

HYBRIDSYSTEM

102-103 ASELKON SA MODELS Technology

Gas powered automatic system. It consists of a self-regulating gas system with a short-stroke piston. It is placed at the bottom of the chamber, near the chamber, to use the hottest gases at a higher pressure.

Gases exiting the barrel expand (in the self-adjusting gas system) and rapidly accelerate the stroke of the piston, which simultaneously strikes the bolt follower pin and pushes it hard enough to cause it to retract. The gas inlet valve is self-regulating as it acts as a regulating valve that expels excess gas during ignition.

The larger the volume of gas flowing through the barrel, the faster the pin valve opens and lets it out, thereby reducing the pressure inside. Selfadjusting, it guarantees shooting accuracy, reliability, durability and certifies Aselkon's technological excellence.





TWIN PISTON/ DOUBLE PISTON

The pistons are required to move only ½" for complete cycling which results in a faster operation with minimum vibration and quick target acquisition.



Each Aselkon barrel is subjected to a proof test with 1500 BAR high pressure test cartridge before leaving our factory.

- 2 -



The receiver is fitted with a generously sized charging handle and bolt release as well as a beveled loading port with an outward angled cartridge drop lever insuring the inter is easy to operate even with gloved hands.









We engineered the interchangeable InterPro Chokes to maximize the constancy of shot placement through reduced friction that enhances load speeds.

- (5) —





The center of gravity is balanced on the forend to ensure a comfortable carry and practical shooting.



COMFORT

The recoil pad is designed for comfort and fast shouldering with high tech microcell material. It's not only a shotgun, it's an experience.









108-109 ASELKON MODELS Tecnical Features

			gines						0	θ	g									
	Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
S4 Black	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-G Black	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-GT Black	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopi	c 5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4 Sandstorm	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-G Sandstorm	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-GT Sandstorm	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopi	c 5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4 Nato Green	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-G Nato Green	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-GT Nato Green	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopi	c 5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4 Titanium	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-G Titanium	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S4-GT Titanium	12 GA 3"	76 mm	Hybrid System, Twin Piston Gas Operated	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopi	c 5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad









112-113 ASELKON S3 MODELS Technology

7

S3 is a pump action: S3 is one of the best possible choice for any operational or defense requirement. This is thanks to its flexible use (lethal and less than lethal ammos), easy handling, precision and high firing volume.

The interchangeable stocks-fixed drop, variable drop and pistol grip-only increase the versatility of this weapon.

EXTRA RAIL

The new forearm with multi rail system allows the mount of mini-rails (5-slots) all over at 3/6/9/12 o'clock.





The receiver is fitted with a generously sized charging handle and bolt release as well as a beveled loading port with an outward angled cartridge drop lever insuring the inter is easy to operate even with gloved hands.



Each Aselkon barrel is subjected to a proof test with 1500 BAR high pressure test cartridge before leaving our factory.




INERTIA

ASELKON) S3

3





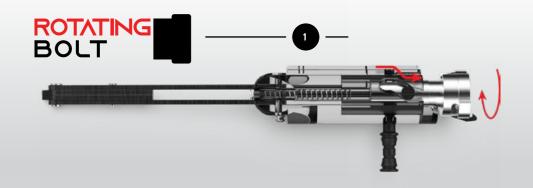





We engineered the interchangeable InterPro Chokes to maximize the constan-cy of shot placement through reduced friction that enhances load speeds.





The center of gravity is balanced on the forend to ensure a comfortable carry and practical shooting.



A

The recoil pad is designed for comfort and fast shouldering with high tech microcell material. It's not only a shotgun, it's an experience.











118-119 ASELKON S3 MODELS Tecnical Features

	GA								0	θ	g									
	Gauge	Chamber	Action	Barrel length	Barrel	Choke	Rib	Stock length	Drop at heel	Drop at comb	Weight	Forend	Receiver	Stock	Magazine Capacity	Safety	Trigger Guard	Trigger	Sight	Recoil Pad
S3 Black	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-G Black	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-GT Black	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3 Sandstorm	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-G Sandstorm	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-GT Sandstorm	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3 Nato Green	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-G Nato Green	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-GT Nato Green	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3 Titanium	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Synthetic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-G Titanium	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	340 mm	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Pistol Grip	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad
S3-GT Titanium	12 GA 3"	76 mm	Hybrid Pump Action	47 Cm	Chrome-Lined, 4140 Steel Inter Bored Barrel	1 InterPro C	Tactical	Telescopic -Ad- justable	55±1 mm, 45-50-60 mm Adjustable	37±1 mm	3.55± kg	Synthetic	Aluminium Anodized/ Cerakote Coating	Tactical Telescopic	5+1 / 7+1 x 12/76	Trigger Safety	Special Polyurethane	Trigger Safety, Automatic Locking System, Anti-Repeat System	Tactical Sight, Ghost Ring Rear Sight	Special Polyurethane Pad



ASK 12

the most COMFORT POWER

















It is a cheek system obtained from special raw material mixtures in order to prevent slipping of the cheek during aiming and to ensure comfortable aiming while maintaining the face sensitivity.










It is a magazine system designed from special materials for automatic pellet scrolling after pellet filling.





High precision accuracy. Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting. Power setting lever increase the range efficiency in use. Larger magazine capacity. Reinforced polymer stock with ergonomic rubber grip. Foldable Tactical Stock, adjustable cheek riser and recoil pad.



Caliber	Regulator	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	K→→→ Total Length	Barrel Length	Type of Barrel	Twist Rate	g Weight	Scope Rail	Replacement Magazine	Colour Option	Case
		output specu	(Joure)	Cupucity	Volume	Tressure	01 011013		Length	Length	Burrer	nute		T tun	magazine		
4.5 mm/ .177cal	Regulated 22 cc	940 FPS	24 J	22	260 сс	200 bar	90	Tactical	1020 mm (40.15)	580 mm	Rifled	1:15	3520 gr (7.76 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Regulated 22 cc	910 FPS	41 J	18	260 сс	200 bar	80	Tactical	1020 mm (40.15)	580 mm	Rifled	1:15	3520 gr (7.76 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Regulated 22 cc	890 FPS	61 J	15	260 сс	200 bar	65	Tactical	1020 mm (40.15)	580 mm	Rifled	1:15	3520 gr (7.76 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase

ASELKON







High precision accuracy. Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting. Power setting lever increase the range efficiency in use. Larger magazine capacity. Premium quality Turkish walnut stock. Ergonomic grip design.



 (\bigcirc) (\cdot) (🖌)) Filling Number Pressure of Shots Tube Volume Caliber Regulator Muzzle Power & Volume Output Speed* (Joule) Magazine Capacity Colour Option Case Turkish 4.5 mm/ .177cal Regulated 940 FPS 24 J 22 260 cc 200 bar 90 820 mm (32.3) 3820 gr 11 mm (8.42 lbs) Dovetail Matte Black / Plastic Glossy Black Hardcase Luxry Walnut 580 mm Rifled 1:15 Turkish Luxry Walnut 5.5 mm /.22 cal Regulated 910 FPS 41 J 18 260 cc 200 bar 80 820 mm (32.3) 3820 gr 11 mm (8.42 lbs) Dovetail Matte Black / Plastic 580 mm Rifled 1:15 Glossy Black Hardcase Turkish Luxry Walnut 6.35 mm / .25 cal Regulated 890 FPS 61 J 15 260 cc 200 bar 65 820 mm (32.3) 3820 gr 11 mm (8.42 lbs) Dovetail Matte Black / Plastic 580 mm Rifled 1:15 Glossy Black Hardcase





High precision accuracy. Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting. Power setting lever increase the range efficiency in use. Premium quality Turkish walnut stock. Larger magazine capacity. Adjustable cheek riser. Larger magazine capacity.



	I		())) +			\bigcirc	K	∼		,	∂	g				
Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	Total Length	Barrel Length	Type of Barrel	Twist Rate	Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Regulated 22 cc	940 FPS	24 J	22	260 сс	200 bar	90	Turkish Luxry Walnut	1020 mm (40.15)	580 mm	Rifled	1:15	3600 gr (7.90 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Regulated 22 cc	910 FPS	41 J	18	260 сс	200 bar	80	Turkish Luxry Walnut	1020 mm (40.15)	580 mm	Rifled	1:15	3600 gr (7.90 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Regulated 22 cc	890 FPS	61 J	15	260 сс	200 bar	65	Turkish Luxry Walnut	1020 mm (40.15)	580 mm	Rifled	1:15	3600 gr (7.90 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase





High precision accuracy. Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting. Power setting lever increase the range efficiency in use. Larger magazine capacity. Premium quality Turkish walnut stock.



(ZA)			()))) +			\bigcirc	K	← →			\mathcal{D}	g				
Caliber	Regulator	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	Total Length	Barrel Length	Type of Barrel	Twist Rate	Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Regulated 22 cc	940 FPS	24 J	22	260 сс	200 bar	90	Turkish Luxry Walnut	1020 mm (40.15)	580 mm	Rifled	1:15	3820 gr (8.42 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Regulated 22 cc	910 FPS	41 J	18	260 сс	200 bar	80	Turkish Luxry Walnut	1020 mm (40.15)	580 mm	Rifled	1:15	3820 gr (8.42 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Regulated 22 cc	890 FPS	61 J	15	260 сс	200 bar	65	Turkish Luxry Walnut	1020 mm (40.15)	580 mm	Rifled	1:15	3820 gr (8.42 lbs)	11 mm Dovetail Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase







MX5

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from 3 to 60 Joules


GZA)	Ø		()))) +			\bigcirc	K	\longleftrightarrow			\mathcal{D}	g				
Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	Total Length	Barrel Length	Type of Barrel	Twist Rate	Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	850/900 FPS	35 J	14	320cc	200 bar	90	Turkish Luxry Walnut	1100 mm(43.30)	550mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
5.5 mm /.22 cal	Optional	850/970 FPS	52 J	12	320cc	200 bar	80	Turkish Luxry Walnut	1100 mm(43.30)	550mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
6.35 mm / .25 cal	Optional	840/890 FPS	62 J	10	320cc	200 bar	65	Turkish Luxry Walnut	1100 mm(43.30)	550mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase







MX6





Kinetic Energy is adjustable from 3 to 60 Joules

GA	Regulator	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	i←───> Total Length	Barrel Length	Type of Barrel	Twist Rate	g Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	850/900 FPS	35 J	14	500 сс	200 bar	90	Turkish Luxry Walnut	1100 mm(43.30)	550mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
5.5 mm /.22 cal	Optional	870/950 FPS	52 J	12	500 сс	200 bar	80	Turkish Luxry Walnut	1100 mm(43.30)	550mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
6.35 mm / .25 cal	Optional	840/890 FPS	62 J	10	500 сс	200 bar	65	Turkish Luxry Walnut	1100 mm(43.30)	550mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase

ASELKON

MX6 MATTE BLACK







MX7

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from 3 to 60 Joules

G A			()	+ 🛤 🛤			\bigcirc	K	\longleftrightarrow			∂	g				
Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	Total Length	Barrel Length	Type of Barrel	Twist Rate	Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	850/1100 FPS	25 J	14	320 сс	200 bar	80	Turkish Luxry Walnut Synthetic	850 mm	550mm	Rifled	1:15	2750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
5.5 mm /.22 cal	Optional	850/900 FPS	49 J	12	320 сс	200 bar	70	Turkish Luxry Walnut Synthetic	850 mm	550mm	Rifled	1:15	2750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
6.35 mm / .25 cal	Optional	840/890 FPS	62 J	10	320 сс	200 bar	55	Turkish Luxry Walnut Synthetic	850 mm	550mm	Rifled	1:15	2750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase





MX7-S

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from **3 to 60 Joules**



(GA) Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume		Number of Shots	Stock	K→→ Total Length	Barrel Length	Type of Barrel	Twist Rate	g Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	830/880 FPS	22 J	14	275сс	200 bar	80	Turkish Luxry Walnut Synthetic	650 mm	450 mm	Rifled	1:15	2600 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
5.5 mm /.22 cal	Optional	830/870 FPS	41 J	12	275сс	200 bar	70	Turkish Luxry Walnut Synthetic	650 mm	450 mm	Rifled	1:15	2600 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase
6.35 mm / .25 cal	Optional	800/850 FPS	54 J	10	275сс	200 bar	55	Turkish Luxry Walnut Synthetic	650 mm	450 mm	Rifled	1:15	2600 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Balck	Plastic Hardcase







MX8

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from **3 to 60 Joules**

(GA) Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure		Stock	K→→ Total Length	Barrel Length	Type of Barrel	Twist Rate	g Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	800/1100 FPS	35 J	14	500 сс	250 bar	90	Synthetic	950 mm	550 mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Optional	870/950 FPS	54 J	12	500 сс	250 bar	80	Synthetic	950 mm	550 mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Optional	840/900 FPS	62 J	10	500 сс	250 bar	65	Synthetic	950 mm	550 mm	Rifled	1:15	3250 gr (7.16 lbs)	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase

ASELKON

MX8 BLACK





MX9

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from **3 to 62 Joules**

(GA) Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	i←───→ Total Length	Barrel Length	Type of Barrel	Twist Rate	Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	800/1100 FPS	35 J	14	500 сс	250 bar	90	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Optional	870/950 FPS	54 J	12	500 сс	250 bar	80	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.35 mm / .25 cal	Optional	840/900 FPS	52 J	10	500 сс	250 bar	65	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase

ASELKON

MX9 WOOD





6.35

MX10

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.





Kinetic Energy is adjustable from **3 to 60 Joules**

Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure		Stock	i←>i Total Length	Barrel Length	Type of Barrel	Twist Rate	B Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	830/950 FPS	22 J	14	320	200 bar	80	Syntetic	850 mm	550 mm	Rifled	1:15	2850 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Optional	830/950 FPS	49 J	12	320	200 bar	70	Syntetic	850 mm	550 mm	Rifled	1:15	2850 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Optional	800/850 FPS	54 J	10	320	200 bar	55	Syntetic	850 mm	550 mm	Rifled	1:15	2850 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase





MX10-S

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.









Kinetic Energy is adjustable from **3 to 60 Joules**

Caliber	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume		Number of Shots	Stock	i←−−−→ Total Length	Barrel Length	Type of Barrel	Twist Rate	g Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	830/890 FPS	22 J	14	275 сс	200 bar	80	Turkish Luxry Walnut Synthetic	850 mm	450 mm	Rifled	1:15	2850 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Optional	830/870 FPS	49 J	12	275 сс	200 bar	70	Turkish Luxry Walnut Synthetic	850 mm	450 mm	Rifled	1:15	2850 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Optional	830/870 FPS	54 J	10	275 сс	200 bar	55	Turkish Luxry Walnut Synthetic	850 mm	450 mm	Rifled	1:15	2850 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase





RAVELLO RX5

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from **3 to 60 Joules**

		\equiv	()	+			٢	K	\longleftrightarrow		<u> </u>	\mathcal{D}	g				
	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure		Stock	Total Length	Barrel Length	Type of Barrel	Twist Rate	Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	850/900 FPS	35 J	14	320 сс	200 bar	90	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3250 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Optional	850/970 FPS	52 J	12	320 сс	200 bar	80	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3250 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Optional	840/890 FPS	62 J	10	320 сс	200 bar	65	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3250 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase

PCP RAVELLO RX5





PCP RAVELLO RX6



RAVELLO RX6

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.



Kinetic Energy is adjustable from 3 to 60 Joules

	Regulator & Volume	Muzzle Output Speed*	Power (Joule)	Magazine Capacity	Tube Volume	Filling Pressure	Number of Shots	Stock	₩ Total Length	Barrel Length	Type of Barrel	Twist Rate	g Weight	Scope Rail	Replacement Magazine	Colour Option	Case
4.5 mm/ .177cal	Optional	850/900 FPS	35 J	14	550 сс	250 bar	90	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
5.5 mm /.22 cal	Optional	850/970 FPS	52 J	12	550 сс	250 bar	80	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase
6.35 mm / .25 cal	Optional	840/890 FPS	62 J	10	550 сс	250 bar	65	Turkish Luxry Walnut	1100 mm (43.30)	550 mm	Rifled	1:15	3750 gr	22 mm Picatinny Rail	Yes	Matte Black / Glossy Black	Plastic Hardcase





AIR RIFLE



158-159 **ASELKON ACCESSORAISES**















www.aselkonarms.com

2 0 2 3



Büyükkayacık O.S.B. 516 Nolu Sk. No:19-19/1 Telephone : +90 332 342 26 12 / +90 332 342 40 04 / Mobile: +90 532 136 08 96 Mobile Export : +90 553 407 00 86 E-Mail : info@aselkon.com.tr / export@aselkon.com.tr

www.aselkonarms.com

Aselkon reserves the right to make modifications to the products shown in this catalogue at any time without prior notice. The finishings, color and patterns shown in this catalogue are approximate, as a printed reproduction causes inevitable color differences. The illustrations and descriptions contained in this catalogue are only provided as an indication.