2023 COLLECTION | SHOTGUN | PCP AIR RIFLE



www.aselkonarms.com

www.aselkonarms.com



We, ASELKONAŞ, are a well established international company that manufactures external factor. In this way, in every stage of production we manage our quality and exports Hunting, Sporting, and Tactical Military Purpose Shotguns, Pistols,
PCP Air Rifles and all spare parts of firearms in accordance with internationally

As well as our major operations in international markets, we continue to cooperate sector since 2006 with our vast experience in manufacturing and exporting to industry. more than 50 countries. Our products are highly appreciated in many leading. As being one of the leading manufacturers in firearms industry, we constantly markets in the world.

productive and experienced technical staff, we manufacture every parts of guns satisfaction. from raw material to final product in our own facilities without depending on any

accepted standards, especially to ATF and CIP proof tests, and Country-Specific with government and military forces in delivering diverse projects regarding Firearms Compliance Regulations. We've been actively operating in the firearms armored vehicles, missile launcher platforms, crane – machinery and construction


improve our product and service quality with the concepts of high automation and flexibility in order to provide better quality products and effective solutions for the Thanks to our 40.000 m² fully integrated production facility, with our dynamic, needs customers. We always aim the best in quality and increase the customer

## FUNCTIONING STOCK DETAILS






DAC is can be adjustable to 35-39 mm

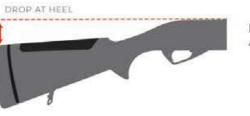

DAH is can be adjustable to 45-50-55-60 mm

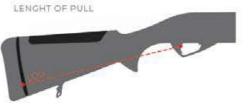

LOP is can be adjustable to -5, -10 mm



152-153

154-155

156-157

## **SHOTGUN**

| <b>%3</b>  | 10-21 | inter       | 46-59 |
|------------|-------|-------------|-------|
| <b>%4</b>  | 22-33 | Red Stone \ | 60-71 |
| <b>%</b> 5 | 34-45 | Red5port    | 72-75 |

| Super<br>MAGNUM | 76-87 | S |
|-----------------|-------|---|
| OVER UNDER      | 88-94 | S |
| TACTICAL        | 94-99 | A |

| STATO4 | 100-109 |
|--------|---------|
| STATO3 | 110-119 |
| ASK 12 | 120-123 |

## PCP AIR RIFLES

| EMPERADOR LS1 128-129 | MX5   | 136-137 | MX8    | 144-145 | RX5    |
|-----------------------|-------|---------|--------|---------|--------|
| EMPERADOR LS2 130-131 | MX6   | 138-139 | MX9    | 146-147 | RX6    |
| EMPERADOR LS3 132-133 | MX7   | 140-141 | MX10   | 148-149 | RX1250 |
| EMPERADOR LS4 134-135 | MX7-S | 142-143 | MX10-S | 150-151 |        |
| <del></del>           |       |         |        |         |        |










Aselkon recoil pads which are made of a mixture of special polyurethane and rubber materials minimize the recoil and provides acomfortable targeting and shooting.







Aselkon's improved loading mechanism provies the user quite a smooth loading.







Aselkon barrels are standard with our precision drilling, honing and chrome coating process.

Aselkon Barrels are designed to increase accuracy, to shoot comfortably and function superbly with both light and heavy



















|                         | G 71     |         | and the same of th |                |  |                           | H                  |              |                                    |              | g        |                      |   |                         |                   |                |                         |   |                      |                             |
|-------------------------|----------|---------|--|----------------|--|---------------------------|--------------------|--------------|------------------------------------|--------------|----------|----------------------|---|-------------------------|-------------------|----------------|-------------------------|---|----------------------|-----------------------------|
|                         | Gauge    | Chamber | Action   | Barrel length  | Barrel   | Choke                     | Rib                | Stock length | Drop at heel                       | Drop at comb | Weight   | Forend               | Receiver                                  | Stock                   | Magazine Capacity | Safety         | Trigger Guard           | Trigger   | Sight                | Recoil Pad                  |
| X3 Silver Light         | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Gray Light           | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Bronze Light         | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Extra Black          | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Matte Black          | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Bronze Pure          | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Dark Black           | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Silver               | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Bottomland           | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Battomland           | Aluminium Anodized/<br>Battomland Coating | Battomland              | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Bottomland Bronze    | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Battomland           | Aluminium Anodized/<br>Cerakote Coating   | Battomland              | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Camo Max5            | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Max5                 | Aluminium Anodized/<br>Max5 Coating       | Max5                    | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Elegant Sea Green    | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Elegant Bronze       | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Elegant Silver       | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Elegant Silver Black | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X3 Elegant Black        | 12 GA 3" | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt  | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1x12/76         | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |









































|                         | G 71<br>L A |         | Forces .  |                |  |                           |                    |              | 0                                  | 0            | g        |                      |   |                         |                   |                |                         |   |                      |                             |
|-------------------------|-------------|---------|---|----------------|--|---------------------------|--------------------|--------------|------------------------------------|--------------|----------|----------------------|---|-------------------------|-------------------|----------------|-------------------------|---|----------------------|-----------------------------|
|                         | Gauge       | Chamber | Action  | Barrel length  | Barrel   | Choke                     | Rib                | Stock length | Drop at heel                       | Drop at comb | Weight   | Forend               | Receiver                                  | Stock                   | Magazine Capacity | Safety         | Trigger Guard           | Trigger   | Sight                | Recoil Pad                  |
| X5 Silver Light         | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Gray Light           | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Bronze Light         | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Extra Black          | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Matte Black          | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Bronze Pure          | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Dark Black           | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Silver               | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Bottomland           | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Bottomland           | Aluminium Anodized/<br>Bottomland Coating | Bottomland              | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Bottomland Bronze    | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Bottomland           | Aluminium Anodized/<br>Cerakote Coating   | Bottomland              | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Camo Max5            | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Max5                 | Aluminium Anodized/<br>Max5 Coating       | Max5                    | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Elegant Sea Green    | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Elegant Bronze       | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Elegant Silver       | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Elegant Silver Black | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized/<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| X5 Elegant Black        | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized/<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |











## elegant

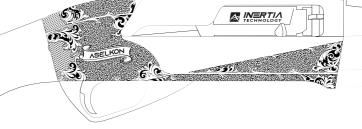



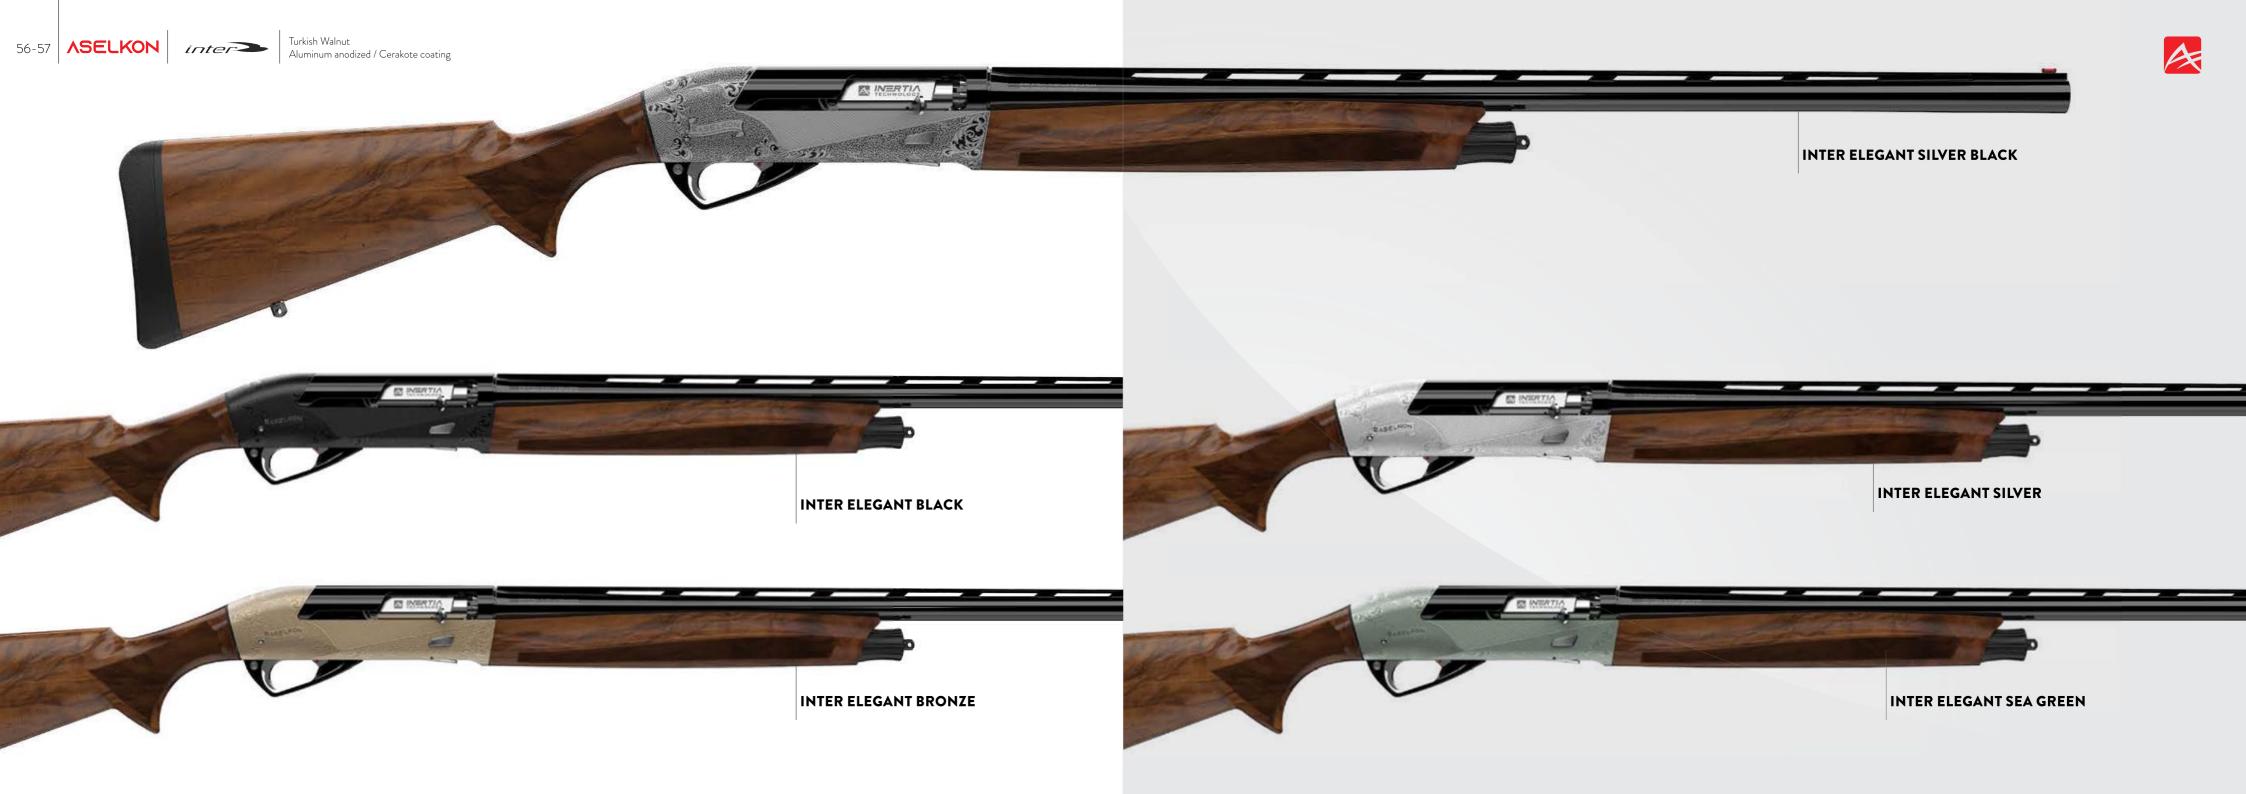



|                            | G 71<br>L A |         | d output  |                |  |                           |                   |              | 0                                  | θ            | g        |                      |  |                         |                   |                |                         |   |                      |                             |
|----------------------------|-------------|---------|---|----------------|--|---------------------------|-------------------|--------------|------------------------------------|--------------|----------|----------------------|--|-------------------------|-------------------|----------------|-------------------------|---|----------------------|-----------------------------|
|                            | Gauge       | Chamber | Action  | Barrel length  | Barrel   | Choke                     | Rib               | Stock length | Drop at heel                       | Drop at comb | Weight   | Forend               | Receiver                                 | Stock                   | Magazine Capacity | Safety         | Trigger Guard           | Trigger   | Sight                | Recoil Pad                  |
| Inter Silver Light         | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Gray Light           | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized Cerakote Coating      | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Bronze Light         | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized Cerakote Coating      | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Extra Black          | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Synthetic            | Aluminium Anodized<br>Cerakote Coating   | Synthetic               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Bronze Pure          | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Dark Black           | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized Cerakote Coating      | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Silver               | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Bottomland           | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Bottomland           | Aluminium Anodized<br>Bottomland Coating | Bottomland              | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Bottomland Bronze    | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Bottomland           | Aluminium Anodized<br>Cerakote Coating   | Bottomland              | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Timber               | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Timber               | Aluminium Anodized<br>Timber Coating     | Timber                  | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Timber Bronze        | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Timber               | Aluminium Anodized<br>Cerakote Coating   | Timber                  | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Camo Max5            | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Camo Max5            | Aluminyum Anodize<br>Camo Max5 Coating   | Camo Max5               | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Elegant Sea Green    | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Elegant Bronze       | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Elegant Silver       | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Elegant Silver-Black | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Elegant Black        | 12 GA 3"    | 76 mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm/<br>High Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 2.85± kg | Turkish Luxry Walnut | Aluminium Anodized<br>Cerakote Coating   | Turkish Luxry<br>Walnut | 4+1               | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |









Red Stone Elegant

Red Stone Elegant Black

Silver-Black

Kinetic Drive Inertial System

Semiautomatic, Rotating Bolt

Kinetic Drive Inertial System

Semiautomatic, Rotating Bolt

12 GA 3" 76 mm

12 GA 3" 76 mm

Chrome-Lined, 4140 Steel

Inter Bored Barrel

Chrome-Lined, 4140 Stee

Inter Bored Barrel

61-66-71-76 cm

61-66-71-76 cm

5 InterPro

C-IC-M-IM-F

5 InterPro

C-IC-M-IM-F

8 mm / High

Rib

8 mm / High

Rib

340 mm

340 mm



Recoil Pad

Special

Polyurethane Pad

Fiber Optic

Fiber Optic

Sight

Fiber Optic

Fiber Optic

Sight

Fiber Optic

Fiber Optic

Sight

Trigger

Trigger Safety, Automatic Locking

System, Anti-Repeat System

Trigger Safety, Automatic Locking

System, Anti-Repeat System

Special

Polyurethane

Special

Polyurethane

Trigger Safety



55±1 mm, 45-50-60 mm

Adiustable

55±1 mm, 45-50-60 mm

Adiustable

37±1 mm

2.85± kg Turkish Luxry Walnut

2.85± kg Turkish Luxry Walnut

Aluminium Anodized

Cerakote Coating

Aluminium Anodized

Cerakote Coating

Turkish Luxry

Walnut

Turkish Luxry

Walnut


4+1/

Extendable

4+1/

Extendable



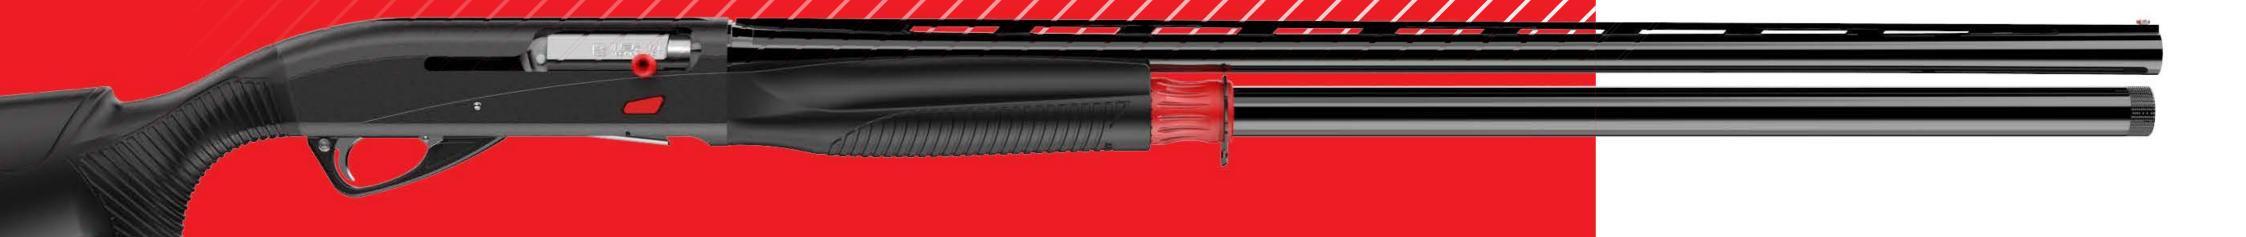

















the most

COMFORT POWER









































Red Sport

12 GA 3" 76 mm Kinetic Drive Inertial System Semiautomatic, Rotating Bolt

Chrome-Lined, 4140 Steel Inter Bored Barrel

5 InterPro 8 mm / High C-IC-M-IM-F Rib

55±1 mm, 45-50-60 mm Adjustable

37±1 mm 2.85± kg

Aluminium Anodized Cerakote Coating

Special Polyurethane Pad





the most































|  | G T           |      | Comm  |                |  |                           |                    |              | 0                                  | 0            | g        |            |  |            |                         |                |                         |   |                      |                             |
|--|---------------|------|---|----------------|--|---------------------------|--------------------|--------------|------------------------------------|--------------|----------|------------|--|------------|-------------------------|----------------|-------------------------|---|----------------------|-----------------------------|
|  | Gauge Chai    | mber | Action  | Barrel length  | Barrel   | Choke                     | Rib                | Stock length | Drop at heel                       | Drop at comb | Weight   | Forend     | Receiver                                 | Stock      | Magazine Capacity       | Safety         | Trigger Guard           | Trigger   | Sight                | Recoil Pad                  |
| Inter Super Magnum<br>Extra Black          | 12 GA 3.5" 89 | mm ç | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Synthetic  | Aluminium Anodized<br>Cerakote Coating   | Synthetic  | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Super Magnum<br>Bottomland           | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Bottomland | Aluminium Anodized<br>Bottomland Coating | Bottomland | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Super Magnum<br>Bottomland Bronze    | 12 GA 3.5" 89 | mm ç | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Bottomland | Aluminium Anodized<br>Cerakote Coating   | Bottomland | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Super Magnum<br>Timber               | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Timber     | Aluminium Anodized<br>Timber Coating     | Timber     | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Super Magnum<br>Timber Bronze        | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Timber     | Aluminium Anodized<br>Cerakote Coating   | Timber     | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Inter Super Magnum<br>Camo Max5            | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Camo Max5  | Aluminium Anodized<br>Camo Max5 Coating  | Camo Max5  | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Redstone Super Magnum<br>Extra Black       | 12 GA 3.5" 89 | mm ç | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Synthetic  | Aluminium Anodized<br>Cerakote Coating   | Synthetic  | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Redstone Super Magnum<br>Bottomland        | 12 GA 3.5" 89 | mm   | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Bottomland | Aluminium Anodized<br>Bottomland Coating | Bottomland | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Redstone Super Magnum<br>Bottomland Bronze | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Bottomland | Aluminium Anodized<br>Cerakote Coating   | Bottomland | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Redstone Super Magnum<br>Timber            | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Timber     | Aluminium Anodized<br>Timber Coating     | Timber     | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Redstone Super Magnum<br>Timber Bronze     | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Timber     | Aluminium Anodized<br>Cerakote Coating   | Timber     | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |
| Redstone Super Magnum<br>Camo Max5         | 12 GA 3.5" 89 | mm ( | Kinetic Drive Inertial System<br>Semiautomatic, Rotating Bolt | 61-66-71-76 cm | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 5 InterPro<br>C-IC-M-IM-F | 8 mm / High<br>Rib | 340 mm       | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.10± kg | Camo Max5  | Aluminium Anodized<br>Camo Max5 Coating  | Camo Max5  | 2+1x12/89<br>Extendable | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Fiber Optic<br>Sight | Special<br>Polyurethane Pad |







the most

COMFORT POWER
























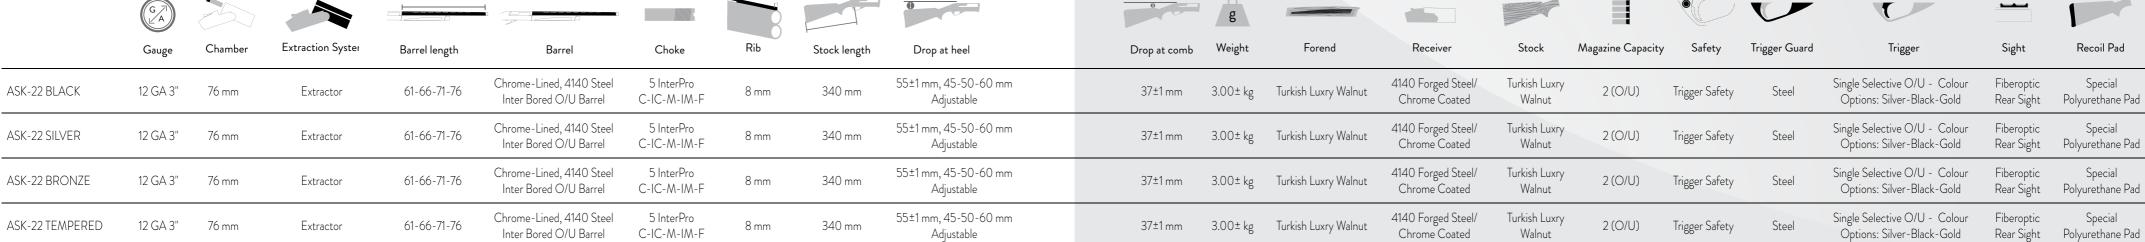
















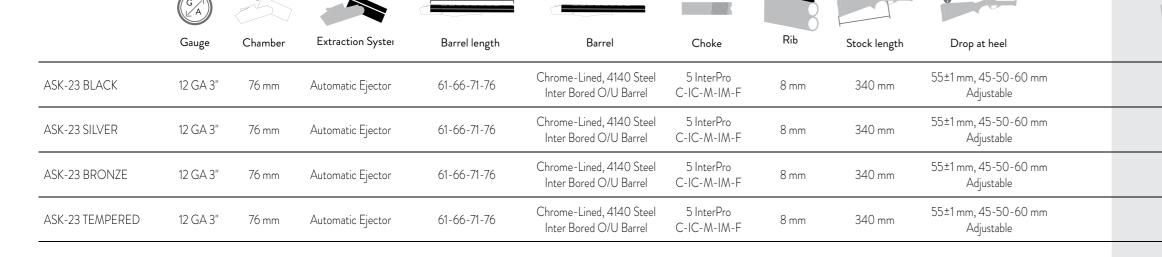







| 0            | g        |                      |                                     |                         |                   |                |               |   |                          |                             |
|--------------|----------|----------------------|-------------------------------------|-------------------------|-------------------|----------------|---------------|---|--------------------------|-----------------------------|
| Drop at comb | Weight   | Forend               | Receiver                            | Stock                   | Magazine Capacity | Safety         | Trigger Guard | Trigger   | Sight                    | Recoil Pad                  |
| 37±1 mm      | 3.00± kg | Turkish Luxry Walnut | 4140 Forged Steel/<br>Chrome Coated | Turkish Luxry<br>Walnut | 2 (O/U)           | Trigger Safety | Steel         | Single Selective O/U - Colour<br>Options: Silver-Black-Gold | Fiberoptic<br>Rear Sight | Special<br>Polyurethane Pad |
| 37±1 mm      | 3.00± kg | Turkish Luxry Walnut | 4140 Forged Steel/<br>Chrome Coated | Turkish Luxry<br>Walnut | 2 (O/U)           | Trigger Safety | Steel         | Single Selective O/U - Colour<br>Options: Silver-Black-Gold | Fiberoptic<br>Rear Sight | Special<br>Polyurethane Pad |
| 37±1 mm      | 3.00± kg | Turkish Luxry Walnut | 4140 Forged Steel/<br>Chrome Coated | Turkish Luxry<br>Walnut | 2 (O/U)           | Trigger Safety | Steel         | Single Selective O/U - Colour<br>Options: Silver-Black-Gold | Fiberoptic<br>Rear Sight | Special<br>Polyurethane Pad |
| 37±1 mm      | 3.00± kg | Turkish Luxry Walnut | 4140 Forged Steel/<br>Chrome Coated | Turkish Luxry<br>Walnut | 2 (O/U)           | Trigger Safety | Steel         | Single Selective O/U - Colour<br>Options: Silver-Black-Gold | Fiberoptic<br>Rear Sight | Special<br>Polyurethane Pad |












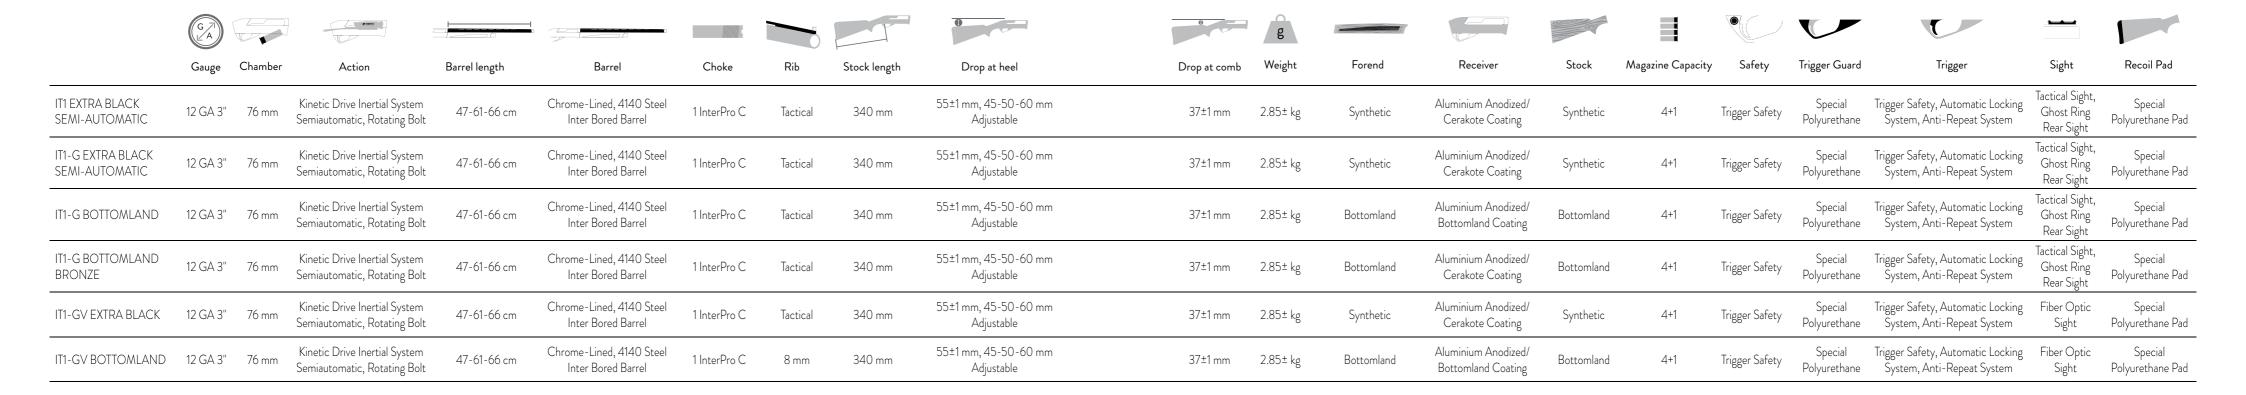



















the most

**COMFORT POWER** 



#### **HYBRID** SYSTEM

Gas powered automatic system. It consists of a self-regulating gas system with a short-stroke piston. It is placed at the bottom of the chamber, near the chamber, to use the hottest gases at a higher pressure.

Gases exiting the barrel expand (in the self-adjusting gas system) and rapidly accelerate the stroke of the piston, which simultaneously strikes the bolt follower pin and pushes it hard enough to cause it to retract. The gas inlet valve is self-regulating as it acts as a regulating valve that expels excess gas during ignition.

The larger the volume of gas flowing through the barrel, the faster the pin valve opens and lets it out, thereby reducing the pressure inside. Selfadjusting, it guarantees shooting accuracy, reliability, durability and certifies Aselkon's technological excellence.







Aselkon barrels are standard with our precision drilling, honing and chrome coating process.

Aselkon Barrels are designed to increase accuracy, to shoot comfortably and function superbly with both light and heavy loads.



#### TWIN PISTON/ **DOUBLE PISTON**

The pistons are required to move only ½" for complete cycling which results in a faster operation with minimum vibration and quick target acquisition.




Each Aselkon barrel is subjected to a proof test with 1500 BAR high pressure test cartridge before leaving our factory.



The receiver is fitted with a generously sized charging handle and bolt release as well as a beveled loading port with an outward angled cartridge drop lever insuring the inter is easy to operate even with gloved hands.





#### INTERPROCHOKE -

We engineered the interchangeable InterPro Chokes to maximize the constancy of shot placement through reduced friction that enhances load speeds.



The center of gravity is balanced on the forend to ensure a comfortable carry and practical shooting.







The recoil pad is designed for comfort and fast shouldering with high tech microcell material. It's not only a shotgun, it's an experience.





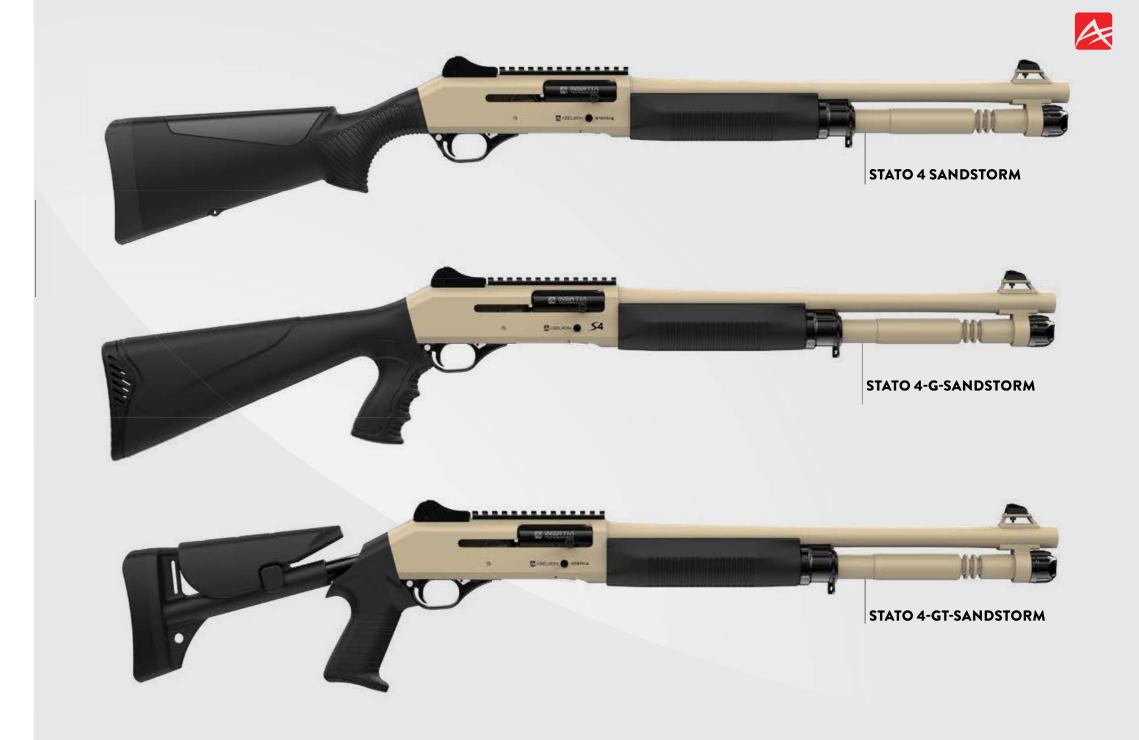

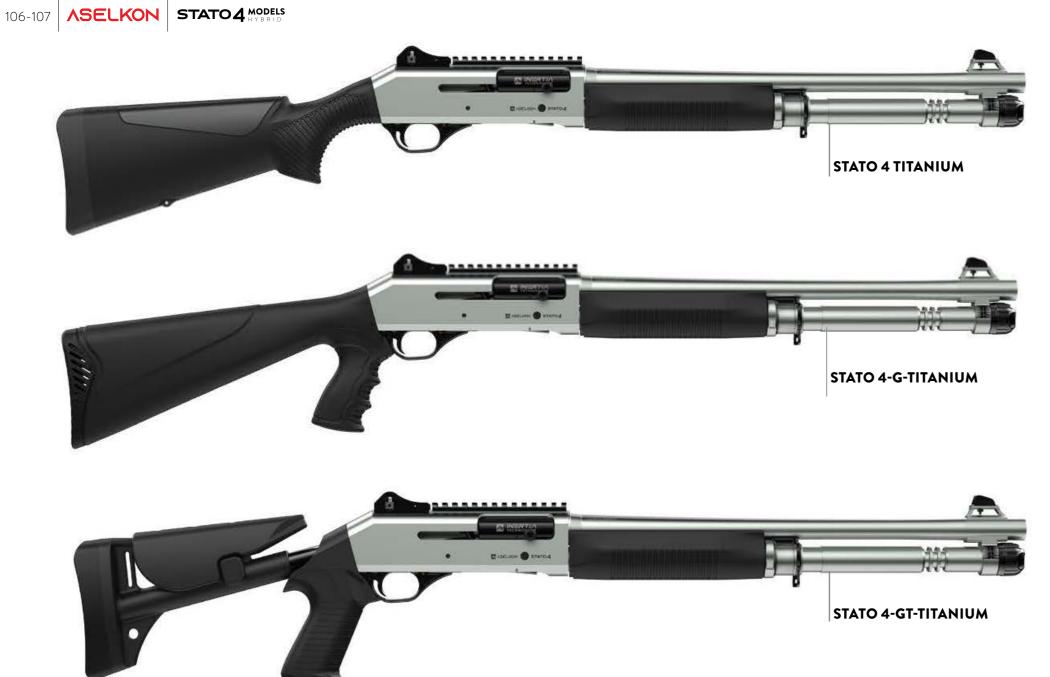





|                       | G 7      |         | poems                                      |               |  |              |          |                             |                                    | 0            | g        |           |   |                         |                         |                |                         |   |  |                             |
|-----------------------|----------|---------|--|---------------|--|--------------|----------|-----------------------------|------------------------------------|--------------|----------|-----------|---|-------------------------|-------------------------|----------------|-------------------------|---|--|-----------------------------|
|                       | Gauge    | Chamber | Action                                     | Barrel length | Barrel   | Choke        | Rib      | Stock length                | Drop at heel                       | Drop at comb | Weight   | Forend    | Receiver                                | Stock                   | Magazine Capacity       | Safety         | Trigger Guard           | Trigger   | Sight                                    | Recoil Pad                  |
| STATO 4 Black         | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-G Black       | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-GT Black      | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | 5+1 / 7+1 x<br>ic 12/76 | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4 Sandstorm     | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-G Sandstorm   | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-GT Sandstorm  | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | 5+1 / 7+1 x<br>ic 12/76 | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4 Nato Green    | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-G Nato Green  | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-GT Nato Green | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | 5+1 / 7+1 x<br>ic 12/76 | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO4Titanium        | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO4-GTitanium      | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76    | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 4-GTTitanium    | 12 GA 3" | 76 mm   | Hybrid System, Twin Piston<br>Gas Operated | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | 5+1 / 7+1 x<br>ic 12/76 | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |





















|                       | G 71<br>L A |         | a control          |               |  |              | F        |                             | 0                                  | θ            | g        |           |   |                         |                           |                |                         |   |  |                             |
|-----------------------|-------------|---------|--------------------|---------------|--|--------------|----------|-----------------------------|------------------------------------|--------------|----------|-----------|---|-------------------------|---------------------------|----------------|-------------------------|---|--|-----------------------------|
|                       | Gauge       | Chamber | Action             | Barrel length | Barrel   | Choke        | Rib      | Stock length                | Drop at heel                       | Drop at comb | Weight   | Forend    | Receiver                                | Stock                   | Magazine Capacity         | Safety         | Trigger Guard           | Trigger   | Sight                                    | Recoil Pad                  |
| STATO 3 Black         | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-G Black       | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-GT Black      | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3 Sandstorm     | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-G Sandstorm   | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-GT Sandstorm  | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3 Nato Green    | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-G Nato Green  | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-GT Nato Green | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | . 5+1 / 7+1 x<br>ic 12/76 | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3 Titanium      | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Synthetic               | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-G Titanium    | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | 340 mm                      | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Pistol<br>Grip | 5+1 / 7+1 x<br>12/76      | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |
| STATO 3-GT Titanium   | 12 GA 3"    | 76 mm   | Hybrid Pump Action | 47 Cm         | Chrome-Lined, 4140 Steel<br>Inter Bored Barrel | 1 InterPro C | Tactical | Telescopic -Ad-<br>justable | 55±1 mm, 45-50-60 mm<br>Adjustable | 37±1 mm      | 3.55± kg | Synthetic | Aluminium Anodized/<br>Cerakote Coating | Tactical Telescop       | . 5+1 / 7+1 x<br>ic 12/76 | Trigger Safety | Special<br>Polyurethane | Trigger Safety, Automatic Locking<br>System, Anti-Repeat System | Tactical Sight, Ghost<br>Ring Rear Sight | Special<br>Polyurethane Pad |







INTERPLUSCHOKE

the most **COMFORT POWER** 

















It is a shock absorbing shoulder system made of a mixture of special polyurethane and rubber materials.



Setting the trigger distances according to the finger structure of each user; (right, left, up and down trigger setting) designed to make the trigger system.










Pressure gauge showing the dry air pressure inside the tube without disturbing the visibility




Specially designed muffler system to provide a quieter shot opportunity













It is a pistol grip system designed from special materials for comfort and ease of grip.

















High precision accuracy.

Tube can be replaceable without pressure loss.

Improved new generation regulator enables easy and consistent setting.

Power setting lever increase the range efficiency in use.

Larger magazine capacity.

Reinforced polymer stock with ergonomic rubber grip.

Foldable Tactical Stock, adjustable cheek riser and recoil pad.












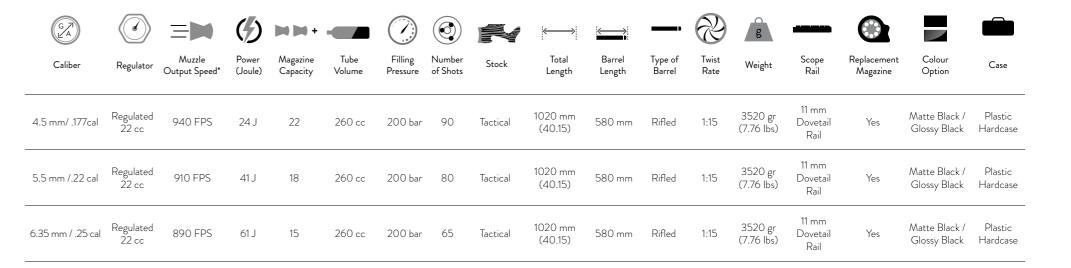







High precision accuracy.

Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting. Power setting lever increase the range efficiency in use. Larger magazine capacity.
Premium quality Turkish walnut stock. Ergonomic grip design.












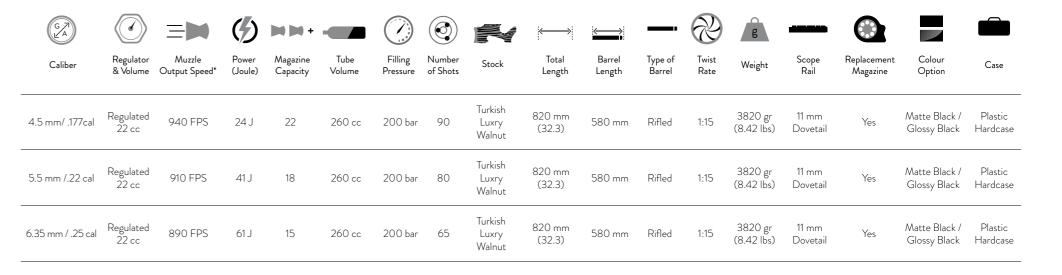





High precision accuracy.
Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting.

Power setting lever increase the range efficiency in use.

Premium quality Turkish walnut stock. Larger magazine capacity. Adjustable cheek riser. Larger magazine capacity.









| (G)A              |                       | $\equiv$                |                  | <b>&gt; &gt; +</b>   |                |                     |                    |                            | $\left \longleftrightarrow\right $ |                  |                   |               | g                     |                           |                         |                               |                     |
|-------------------|-----------------------|-------------------------|------------------|----------------------|----------------|---------------------|--------------------|----------------------------|------------------------------------|------------------|-------------------|---------------|-----------------------|---------------------------|-------------------------|-------------------------------|---------------------|
| Caliber           | Regulator<br>& Volume | Muzzle<br>Output Speed* | Power<br>(Joule) | Magazine<br>Capacity | Tube<br>Volume | Filling<br>Pressure | Number<br>of Shots | Stock                      | Total<br>Length                    | Barrel<br>Length | Type of<br>Barrel | Twist<br>Rate | Weight                | Scope<br>Rail             | Replacement<br>Magazine | Colour<br>Option              | Case                |
| 4.5 mm/ .177cal   | Regulated<br>22 cc    | 940 FPS                 | 24 J             | 22                   | 260 сс         | 200 bar             | 90                 | Turkish<br>Luxry<br>Walnut | 1020 mm<br>(40.15)                 | 580 mm           | Rifled            | 1:15          | 3600 gr<br>(7.90 lbs) | 11 mm<br>Dovetail<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Regulated<br>22 cc    | 910 FPS                 | 41 J             | 18                   | 260 cc         | 200 bar             | 80                 | Turkish<br>Luxry<br>Walnut | 1020 mm<br>(40.15)                 | 580 mm           | Rifled            | 1:15          | 3600 gr<br>(7.90 lbs) | 11 mm<br>Dovetail<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Regulated<br>22 cc    | 890 FPS                 | 61 J             | 15                   | 260 сс         | 200 bar             | 65                 | Turkish<br>Luxry<br>Walnut | 1020 mm<br>(40.15)                 | 580 mm           | Rifled            | 1:15          | 3600 gr<br>(7.90 lbs) | 11 mm<br>Dovetail<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |





High precision accuracy.
Tube can be replaceable without pressure loss. Improved new generation regulator enables easy and consistent setting.

Power setting lever increase the range efficiency in use.

Larger magazine capacity.

Premium quality Turkish walnut stock.









| (G)               |                    | $\equiv$                | <b>(</b> )       | <b>&gt; &gt; +</b>   |                |                     |                    |                            | $ \longleftarrow $ | $\longleftrightarrow$ | _                 |               | g                     |                           |                         |                               |                     |
|-------------------|--------------------|-------------------------|------------------|----------------------|----------------|---------------------|--------------------|----------------------------|--------------------|-----------------------|-------------------|---------------|-----------------------|---------------------------|-------------------------|-------------------------------|---------------------|
| Caliber           | Regulator          | Muzzle<br>Output Speed* | Power<br>(Joule) | Magazine<br>Capacity | Tube<br>Volume | Filling<br>Pressure | Number<br>of Shots | Stock                      | Total<br>Length    | Barrel<br>Length      | Type of<br>Barrel | Twist<br>Rate | Weight                | Scope<br>Rail             | Replacement<br>Magazine | Colour<br>Option              | Case                |
| 4.5 mm/ .177cal   | Regulated<br>22 cc | 940 FPS                 | 24 J             | 22                   | 260 сс         | 200 bar             | 90                 | Turkish<br>Luxry<br>Walnut | 1020 mm<br>(40.15) | 580 mm                | Rifled            | 1:15          | 3820 gr<br>(8.42 lbs) | 11 mm<br>Dovetail<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Regulated<br>22 cc | 910 FPS                 | 41 J             | 18                   | 260 сс         | 200 bar             | 80                 | Turkish<br>Luxry<br>Walnut | 1020 mm<br>(40.15) | 580 mm                | Rifled            | 1:15          | 3820 gr<br>(8.42 lbs) | 11 mm<br>Dovetail<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Regulated<br>22 cc | 890 FPS                 | 61 J             | 15                   | 260 сс         | 200 bar             | 65                 | Turkish<br>Luxry<br>Walnut | 1020 mm<br>(40.15) | 580 mm                | Rifled            | 1:15          | 3820 gr<br>(8.42 lbs) | 11 mm<br>Dovetail<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |





Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.







Kinetic Energy is adjustable from



| GA<br>Caliber     | Regulator<br>& Volume | Muzzle Output Speed* | Power (Joule) | Magazine<br>Capacity | Tube<br>Volume |         | Number of Shots | Stock                      | Total<br>Length   | Barrel<br>Length | Type of<br>Barrel | Twist<br>Rate | g<br>Weight           | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
|-------------------|-----------------------|----------------------|---------------|----------------------|----------------|---------|-----------------|----------------------------|-------------------|------------------|-------------------|---------------|-----------------------|----------------------------|-------------------------|-------------------------------|---------------------|
| 4.5 mm/ .177cal   | Optional              | 850/900<br>FPS       | 35 J          | 14                   | 320cc          | 200 bar | 90              | Turkish<br>Luxry<br>Walnut | 1100<br>mm(43.30) | 550mm            | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 850/970<br>FPS       | 52 J          | 12                   | 320cc          | 200 bar | 80              | Turkish<br>Luxry<br>Walnut | 1100<br>mm(43.30) | 550mm            | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional              | 840/890<br>FPS       | 62 J          | 10                   | 320cc          | 200 bar | 65              | Turkish<br>Luxry<br>Walnut | 1100<br>mm(43.30) | 550mm            | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |





Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.







Kinetic Energy is adjustable from



| (GA)<br>Caliber   | Regulator |                | Power (Joule) | Magazine Capacity | Tube<br>Volume | Filling | Number | Stock                      | Total<br>Length   | Barrel<br>Length | Type of<br>Barrel | Twist<br>Rate | g<br>Weight           | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
|-------------------|-----------|----------------|---------------|-------------------|----------------|---------|--------|----------------------------|-------------------|------------------|-------------------|---------------|-----------------------|----------------------------|-------------------------|-------------------------------|---------------------|
| 4.5 mm/ .177cal   | Optional  | 850/900<br>FPS | 35 J          | 14                | 500 сс         | 200 bar | 90     | Turkish<br>Luxry<br>Walnut | 1100<br>mm(43.30) | 550mm            | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional  | 870/950<br>FPS | 52 J          | 12                | 500 cc         | 200 bar | 80     | Turkish<br>Luxry<br>Walnut | 1100<br>mm(43.30) | 550mm            | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional  | 840/890<br>FPS | 62 J          | 10                | 500 cc         | 200 bar | 65     | Turkish<br>Luxry<br>Walnut | 1100<br>mm(43.30) | 550mm            | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |





Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.







Kinetic Energy is adjustable from



| G 7               |                       | $\equiv$                |                  | <b>&gt; &gt; +</b>   |                |                     |                    |                                      | $\longleftrightarrow$ |                  | -                 | 8             | g       |                            |                         |                               |                     |
|-------------------|-----------------------|-------------------------|------------------|----------------------|----------------|---------------------|--------------------|--------------------------------------|-----------------------|------------------|-------------------|---------------|---------|----------------------------|-------------------------|-------------------------------|---------------------|
| Caliber           | Regulator<br>& Volume | Muzzle<br>Output Speed* | Power<br>(Joule) | Magazine<br>Capacity | Tube<br>Volume | Filling<br>Pressure | Number<br>of Shots | Stock                                | Total<br>Length       | Barrel<br>Length | Type of<br>Barrel | Twist<br>Rate | Weight  | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
| 4.5 mm/ .177cal   | Optional              | 850/1100<br>FPS         | 25 J             | 14                   | 320 cc         | 200 bar             | 80                 | Turkish Luxry<br>Walnut<br>Synthetic | 850 mm                | 550mm            | Rifled            | 1:15          | 2750 gr | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 850/900<br>FPS          | 49 J             | 12                   | 320 cc         | 200 bar             | 70                 | Turkish Luxry<br>Walnut<br>Synthetic | 850 mm                | 550mm            | Rifled            | 1:15          | 2750 gr | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |
| 5.35 mm / .25 cal | Optional              | 840/890<br>FPS          | 62 J             | 10                   | 320 cc         | 200 bar             | 55                 | Turkish Luxry<br>Walnut<br>Synthetic | 850 mm                | 550mm            | Rifled            | 1:15          | 2750 gr | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Balck | Plastic<br>Hardcase |



#### **MX7-S**

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.








Kinetic Energy is adjustable from







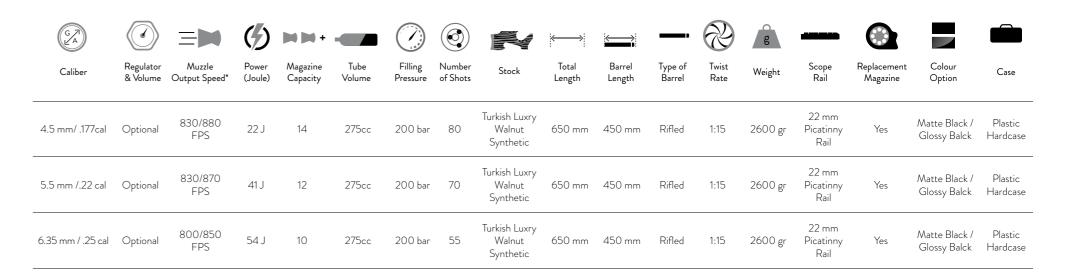





Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.









Kinetic Energy is adjustable from



| (GA)              |                       | $\equiv$                |                  | <b>&gt; &gt; +</b>   |                |                     |                    |           | $ \longleftrightarrow $ | $\longleftrightarrow$ |                   | 8             | g                     |                            |                         |                               |                     |
|-------------------|-----------------------|-------------------------|------------------|----------------------|----------------|---------------------|--------------------|-----------|-------------------------|-----------------------|-------------------|---------------|-----------------------|----------------------------|-------------------------|-------------------------------|---------------------|
| Caliber           | Regulator<br>& Volume | Muzzle<br>Output Speed* | Power<br>(Joule) | Magazine<br>Capacity | Tube<br>Volume | Filling<br>Pressure | Number<br>of Shots | Stock     | Total<br>Length         | Barrel<br>Length      | Type of<br>Barrel | Twist<br>Rate | Weight                | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
| 4.5 mm/ .177cal   | Optional              | 800/1100<br>FPS         | 35 J             | 14                   | 500 сс         | 250 bar             | 90                 | Synthetic | 950 mm                  | 550 mm                | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 870/950<br>FPS          | 54 J             | 12                   | 500 сс         | 250 bar             | 80                 | Synthetic | 950 mm                  | 550 mm                | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional              | 840/900<br>FPS          | 62 J             | 10                   | 500 cc         | 250 bar             | 65                 | Synthetic | 950 mm                  | 550 mm                | Rifled            | 1:15          | 3250 gr<br>(7.16 lbs) | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |





Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.









Kinetic Energy is adjustable from



| G A               |                       | $\equiv$                |                  | <b>&gt; &gt; +</b>   |                |                     |                    |                         | $ \!\!\!\leftarrow\!\!\!\rightarrow\!\!\! $ | $\longleftrightarrow$ |                   |               | g       |                            |                         |                               |                     |
|-------------------|-----------------------|-------------------------|------------------|----------------------|----------------|---------------------|--------------------|-------------------------|---|-----------------------|-------------------|---------------|---------|----------------------------|-------------------------|-------------------------------|---------------------|
| Caliber           | Regulator<br>& Volume | Muzzle<br>Output Speed* | Power<br>(Joule) | Magazine<br>Capacity | Tube<br>Volume | Filling<br>Pressure | Number<br>of Shots | Stock                   | Total<br>Length                             | Barrel<br>Length      | Type of<br>Barrel | Twist<br>Rate | Weight  | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
| 4.5 mm/ .177cal   | Optional              | 800/1100<br>FPS         | 35 J             | 14                   | 500 сс         | 250 bar             | 90                 | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30)                          | 550 mm                | Rifled            | 1:15          | 3750 gr | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 870/950<br>FPS          | 54 J             | 12                   | 500 сс         | 250 bar             | 80                 | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30)                          | 550 mm                | Rifled            | 1:15          | 3750 gr | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional              | 840/900<br>FPS          | 52 J             | 10                   | 500 cc         | 250 bar             | 65                 | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30)                          | 550 mm                | Rifled            | 1:15          | 3750 gr | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |



Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.









Kinetic Energy is adjustable from





| Caliber           | Regulator<br>& Volume | Muzzle Output Speed* | Power (Joule) | Magazine Capacity | Tube<br>Volume | Filling<br>Pressure | Number of Shots | Stock    | Total<br>Length | Barrel<br>Length | Type of<br>Barrel | Twist<br>Rate | g<br>Weight | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
|-------------------|-----------------------|----------------------|---------------|-------------------|----------------|---------------------|-----------------|----------|-----------------|------------------|-------------------|---------------|-------------|----------------------------|-------------------------|-------------------------------|---------------------|
| 4.5 mm/ .177cal   | Optional              | 830/950<br>FPS       | 22 J          | 14                | 320            | 200 bar             | 80              | Syntetic | 850 mm          | 550 mm           | Rifled            | 1:15          | 2850 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 830/950<br>FPS       | 49 J          | 12                | 320            | 200 bar             | 70              | Syntetic | 850 mm          | 550 mm           | Rifled            | 1:15          | 2850 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional              | 800/850<br>FPS       | 54 J          | 10                | 320            | 200 bar             | 55              | Syntetic | 850 mm          | 550 mm           | Rifled            | 1:15          | 2850 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |



#### **MX10-S**

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.










Kinetic Energy is adjustable from





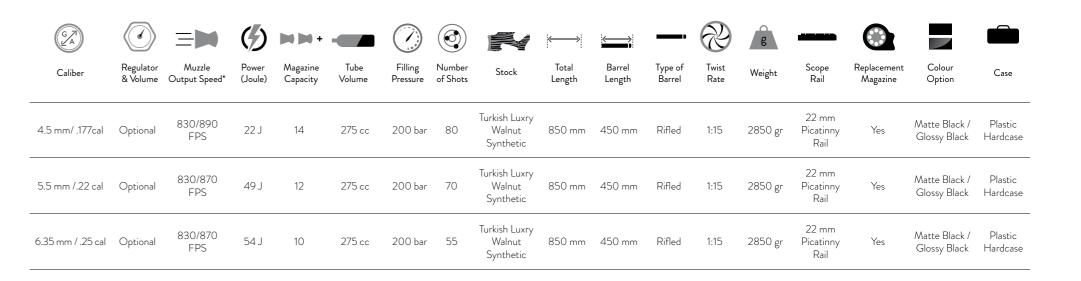



### **RAVELLO RX5**

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.







Kinetic Energy is adjustable from



|                   | Regulator<br>& Volume | Muzzle Output Speed* | Power (Joule) | Magazine<br>Capacity | Tube<br>Volume | Filling<br>Pressure |    | Stock                   | Total<br>Length    | Barrel<br>Length | Type of<br>Barrel | Twist<br>Rate | g<br>Weight | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
|-------------------|-----------------------|----------------------|---------------|----------------------|----------------|---------------------|----|-------------------------|--------------------|------------------|-------------------|---------------|-------------|----------------------------|-------------------------|-------------------------------|---------------------|
| 4.5 mm/ .177cal   | Optional              | 850/900<br>FPS       | 35 J          | 14                   | 320 cc         | 200 bar             | 90 | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30) | 550 mm           | Rifled            | 1:15          | 3250 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 850/970<br>FPS       | 52 J          | 12                   | 320 cc         | 200 bar             | 80 | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30) | 550 mm           | Rifled            | 1:15          | 3250 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional              | 840/890<br>FPS       | 62 J          | 10                   | 320 cc         | 200 bar             | 65 | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30) | 550 mm           | Rifled            | 1:15          | 3250 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |



## **RAVELLO RX6**

Side lever cocking system with manuel locking system. Adjustable cheek piece soft rubber coated. Rubber grip for a better control and shooting feeling Precision rifled barrel special coated. Micro adjustable rear sight for both windage and elevation Truglo Special stainless black elecsol coating.







Kinetic Energy is adjustable from



|                   | Regulator<br>& Volume | Muzzle Output Speed* | Power (Joule) | Magazine Capacity | Tube<br>Volume | Filling<br>Pressure | Number of Shots | Stock                   | ←→<br>Total<br>Length | Barrel<br>Length | Type of<br>Barrel | Twist Rate | g<br>Weight | Scope<br>Rail              | Replacement<br>Magazine | Colour<br>Option              | Case                |
|-------------------|-----------------------|----------------------|---------------|-------------------|----------------|---------------------|-----------------|-------------------------|-----------------------|------------------|-------------------|------------|-------------|----------------------------|-------------------------|-------------------------------|---------------------|
|                   |                       |                      |               |                   |                |                     |                 |                         | _                     |                  |                   |            |             |                            | _                       |                               |                     |
| 4.5 mm/ .177cal   | Optional              | 850/900<br>FPS       | 35 J          | 14                | 550 cc         | 250 bar             | 90              | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30)    | 550 mm           | Rifled            | 1:15       | 3750 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 5.5 mm /.22 cal   | Optional              | 850/970<br>FPS       | 52 J          | 12                | 550 cc         | 250 bar             | 80              | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30)    | 550 mm           | Rifled            | 1:15       | 3750 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |
| 6.35 mm / .25 cal | Optional              | 840/890<br>FPS       | 62 J          | 10                | 550 cc         | 250 bar             | 65              | Turkish Luxry<br>Walnut | 1100 mm<br>(43.30)    | 550 mm           | Rifled            | 1:15       | 3750 gr     | 22 mm<br>Picatinny<br>Rail | Yes                     | Matte Black /<br>Glossy Black | Plastic<br>Hardcase |









|                 | _              |                         |                  | <b>⋈ ⋈ +</b>         |                         | $\longleftrightarrow$ | $\longleftrightarrow$ |                   |               | g       |                   |                         |                  |           |
|-----------------|----------------|-------------------------|------------------|----------------------|-------------------------|-----------------------|-----------------------|-------------------|---------------|---------|-------------------|-------------------------|------------------|-----------|
|                 | Piston<br>Type | Muzzle<br>Output Speed* | Power<br>(Joule) | Magazine<br>Capacity | Stock                   | Total<br>Length       | Barrel<br>Length      | Type of<br>Barrel | Twist<br>Rate | Weight  | Scope<br>Rail     | Replacement<br>Magazine | Colour<br>Option | Case      |
| 4.5 mm/ .177cal | Gas Piston     | 780 FPS                 | <20 J            | Single               | Syntetic/<br>Camo Max 5 | 1100 mm<br>(43.30)    | 450 mm                | Rifled            | 1:15          | 3050 gr | 11 mm<br>Dovetail | No                      | Matte Black      | Cardboard |
| 5.5 mm /.22 cal | Gas Piston     | 650 FPS                 | <20 J            | Single               | Syntetic/<br>Camo Max 5 | 1100 mm<br>(43.30)    | 450 mm                | Rifled            | 1:15          | 3050 gr | 11 mm<br>Dovetail | No                      | Matte Black      | Cardboard |































aselkon









www.aselkonarms.com

2 0 2 3



Büyükkayacık O.S.B. 516 Nolu Sk. No:19-19/1
Telephone : +90 332 342 26 12 / +90 332 342 40 04 / Mobile: +90 532 136 08 96

Mobile Export: +90 553 407 00 86

E-Mail : info@aselkon.com.tr / export@aselkon.com.tr

www.aselkonarms.com